


PRODUCT FICHE

ASKO

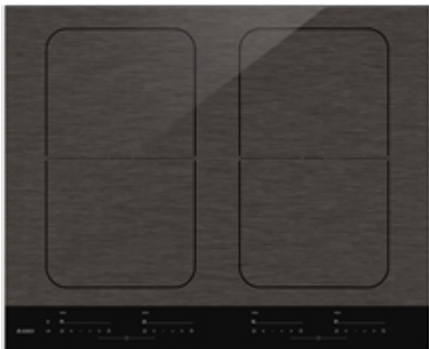

Hob
467598
HI1655M

USP :

Product group	Induction hob
Image	
Booster on all zones	✓
Auto pan detection	✓
Bridge Zone technology	✓
Pause function	✓
Central switch off	✓
Overheating switch off	✓
Residual heat indicator	Ensuring even greater safety, residual energy indicators illuminate to reveal which zones of the hob are still radiating heat. As long as an indicator is lit, the respective heating zone should not be touched. It can, however, be used for defrosting or keeping a dish warm.
Cooking time limiter	✓

Basic information :

Product group	Hob
Brand	ASKO
Product name / Commercial code	HI1655M
Commercial code	467598
EAN code	3838942760327
Construction type	Built-in
Control type	Electronic
Energy input	Electricity
Total number of positions that can be used at the same time	4
Number of gas burners	/
Number of electric cooking zones	4
Number of electric plates	/
Number of radiant plates	/
Number of halogen plates	/
Number of induction plates	4
Number of electric warming zones	4
Location of control panel	Hob front
Basic external material of hob surface	Ceramic Glass
Hob color	Black
Hob frame material	Without frame
Hob edges	/ Alu edges black/black
Electrical connection rating	7400 W
Gas connection rating	/
Current	/
Voltage	220-240
Frequency	50/60
Marks of conformity	CE, VDEGS, EAC, RCM, SAA742EA
Plug type	Without plug and supply cord
Width of the product	644 mm
Height of the product	52 mm
Depth of the product	522 mm
Width of the packed product	770 mm
Height of the packed product	145 mm
Depth of the packed product	610 mm
Min height of installation niche	48 mm
Max height of installation niche	/
Min width of installation niche	560 mm
Max width of installation niche	/
Depth of installation niche	490 mm
Net weight	11,0 kg
Gross weight	12,9 kg

Location of control panel

/

Features :

Short description of the product	HI6ETA02 - HI1655M
Automatic programmes	No
Location of 1st heating element	Front left
Type of 1st heating element	Induction heater-octa
Dimension of 1st heating element	190X220 mm
Power of 1st heating element	2300/3700/0 W
Location of 2nd heating element	Rear left
Type of 2nd heating element	Induction heater-octa
Dimension of 2nd heating element	190X220 mm
Power of 2nd heating element	2300/3700/0 W
Location of 3rd heating element	Rear right
Type of 3rd heating element	Induction heater-octa
Dimension of 3rd heating element	190X220 mm
Power of 3rd heating element	2300/3700/0 W
Location of 4th heating element	Front right
Type of 4th heating element	Induction heater-octa
Dimension of 4th heating element	190X220 mm
Power of 4th heating element	2300/3700/0 W
Power on indicator	Yes
Plate on indicator	4
Type of regulation	Step energy regulated
Type of lid	None
Residual heat indicator	Four parts
Main on/off switch	No
Safety device	Yes
Accessories included	
Electronic timer	Switch-off

